

# Pro Double Towers AGR


250 x 135 cm | 6.2 / 8.2 m



✓ EN1004

PRO

10 YEAR WARRANTY

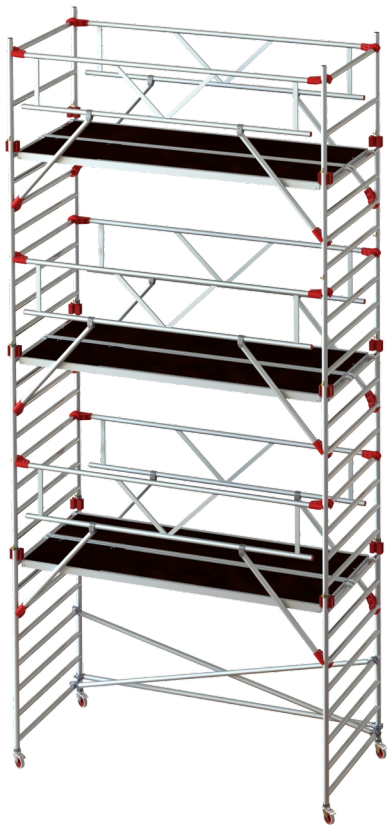

## Specifications

- Working Height: 8.2 m
- Standing Height: 6.2 m
- Scaffolding Class: 3.0
- Load Capacity: 200 kg/m²
- Length: 250
- Width: 135 cm
- Weight: 247.08 kg
- Material: Aluminium, Plastic, Veneer
- Colour: Grey
- Castor Size: Ø12,5 cm
- Certification: EN1004
- Jumbo Brand: PRO SCAFFOLDS

| Product no. | DBNumber | EAN Code | Jumbo Brand   | Warranty | Net Weight |
|-------------|----------|----------|---------------|----------|------------|
| 9900-6-A    | 2335426  |          | PRO SCAFFOLDS | 10 years | 247.08 kg  |

## Description

The JUMBO Scaffolding Pro Double Towers AGR is a professional-grade aluminium scaffold, perfect for craftsmen who require high quality and flexibility in their work. This set is specially configured for 2 m planking, with a maximum height to the first platform of 3.40 m and a distance of 2.25 m between subsequent platforms.

The scaffold is equipped with AGR (Advanced Guardrail) guardrails featuring built-in diagonal bracing, which adds extra stability and safety during use. The AGR guardrails are made with high-impact claws from fibreglass-reinforced plastic, ensuring a strong and reliable structure.

2m planking: Max. height to the first platform is 3.40 m and max. 2.25 m between following platforms.

Materials: The frames are made of aluminium with fully welded joints for added strength and stability. The scaffold decks are made from waterproof, non-slip Finnish birch plywood, mounted in strong aluminium frames. The staggered hooks on the decks allow for lengthwise extension without displacement. Additionally, the platforms are secured with a patented storm lock underneath, providing safety during windy conditions.

JUMBO Scaffolding is supplied as standard with extra sturdy Ø125 mm castors with brakes. The castors feature a durable pol

## Detail Images



Non-slip platforms equipped with staggered hooks, which makes lengthwise extension without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold



Fully welded frames



Impact-resistant Fibreglass Reinforced Plastic Claws


## The set consists of

|        |              |                             |        |            |  |
|--------|--------------|-----------------------------|--------|------------|--|
| 4 STK  | 1400125      | Castor w/brakes             | 5 STK  | 12135200   | Frame 2 m                              |
| 2 STK  | 12135100     | Frame 1 m                   | 2 STK  | 12135101   | Guardrail frame wide                   |
| 2 STK  | 1102504      | Diagonals                   | 1 STK  | 1102500    | Horizontal brace / diagonal            |
| 6 STK  | 1102500-AGR  | Railing w/diagonals         | 3 STK  | 1002501    | Platform w/hatch                       |
| 3 STK  | 1002500      | Platform w/o hatch          | 14 STK | 1600100    | Safety clips                           |
| 12 STK | FLB-1        | Toeboard clip               | 1 STK  | mont-RULLE | Assembly instructions Rolling scaffold |
| 1 STK  | katalog/avis | JUMBO 2024 product brochure |        |            |  |

## Spareparts



## Accessories



Railing w/diagonals  
1102500-AGR  
2335720



Toeboard Sets  
1620178s  
5741563



Exchanges castors  
1400204  
7782766



Platform Sets w/Railing  
102501BK  
7782725



Frame 1 m  
12135100  
7782790



Frame 1 m  
12074100  
7782816



Frame 0,5 m  
12074050  
5929662



Outrigger  
1410250  
7782758



Extensions set for double  
towers

b-1

7782709