


Pro Double Tower

250 x 135 cm | 8.2 / 10.2 m

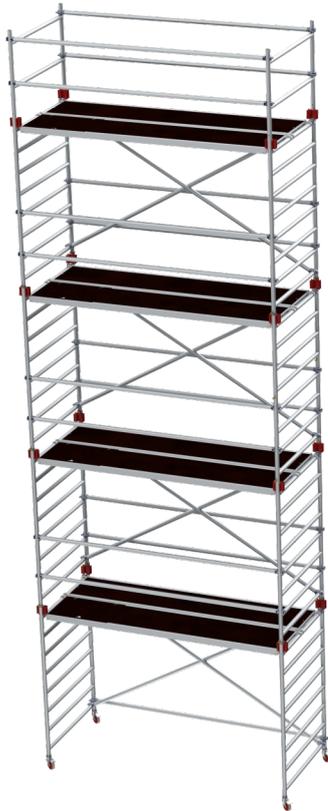

Specifications

Working Height: 10.2 m
Standing Height: 8.2 m
Scaffolding Class: 3.0
Load Capacity: 200 kg/m²
Length: 250
Width: 135 cm
Weight: 314.9 kg
Material: Aluminium, Veneer
Colour: Grey
Castor Size: Ø12,5 cm
Certification: EN1004
Jumbo Brand: PRO SCAFFOLDS

Product no.	DBNumber	EAN Code	Jumbo Brand	Warranty	Net Weight
9900-8-T	2272315		PRO SCAFFOLDS	10 years	314.9 kg

Description

The JUMBO Scaffolding Pro Double Towers is a versatile and robust aluminium scaffold, specially designed for professional craftsmen who demand high quality and flexibility. This set is configured for either 2m or 4m planking, allowing easy adjustment of platform heights to suit specific tasks.

2m planking: Maximum height to the first platform is 3.40 m, and the distance between subsequent platforms is 2.25 m.

4m planking: Maximum height to the first platform is 4.40 m, with a platform distance of up to 4.00 m.

The scaffolding is built with fully welded joints on all frames, ensuring exceptional strength and stability. The diagonal braces and guardrails are fitted with high-impact claws, all with fully welded joints, providing additional durability.


The platforms are constructed from waterproof and non-slip Finnish birch plywood, mounted in strong aluminium frames. The hooks on the platforms are staggered, allowing for lengthwise extension without displacement. Additionally, the platforms are secured with a patented storm lock underneath, providing added safety.

JUMBO scaffolding is supplied as standard with Ø125 mm castors with brakes. These castors feature a polyurethane coating,

Detail Images



Non-slip platforms equipped with staggered hooks, which makes lengthwise extension without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold



Fully welded frames




High-impact self-locking claws on all horizontal braces and diagonals (tube dimensions: Ø50x2mm). The claws are cast solid quality with fully welded joints.

The set consists of

4 PCS	1002500	Platform w/o hatch
17 PCS	1102500	Horizontal brace / diagonal
4 PCS	1400125	Castor w/brakes
2 PCS	12135100	Frame 1 m
7 PCS	12135200	Frame 2 m
1 PCS	mont-RULLE	Assembly instructions Rolling scaffold

4 PCS	1002501	Platform w/hatch
8 PCS	1103050	Horizontal brace / diagonal
18 PCS	1600100	Safety clips
2 PCS	12135101	Guardrail frame wide
16 PCS	FLB-1	Toeboard clip
1 PCS	katalog/avis	JUMBO 2024 product brochure

Spareparts



Accessories



Frame 2 m
12135200
7782782



Extensions set for double towers
b-1
7782709



Platform Sets w/Railing
102501BK
7782725



Toeboard Sets
1620250b
5741552



Exchanges castors
1400204
7782766



Outrigger
1410250
7782758