Pro Single Towers w/mounting Platform

305 x 74 cm | 3.2 / 5.2 m

EN1004 PRO 10 YEAR WARRANTY

Specifications

Working Height: 5.2 m
Standing Height: 3.2 m
Scaffolding Class: 3.0
Load Capacity: 200 kg/m²
Length: 305 cm
Width: 74 cm
Weight: 109.94 kg
Material: Aluminium,Veneer
Colour: Grey
Castor Size: Ø12,5 cm
Certification: EN1004
Jumbo Brand: PRO SCAFFOLDS

Product no.	DBNumber	EAN Code	Jumbo Brand	Warranty	Net Weight
79305-M	1613104		PRO SCAFFOLDS	10 years	109.94 kg

Description

JUMBO Scaffolding Pro Single Towers is a versatile aluminium scaffold in professional craftsman quality, ideal for both small and large tasks. This set is specifically designed for 2 m and 4 m planking, offering flexibility in platform heights, making it suitable for various work applications.

2 m planking: Max. height to the first platform is 3.40 m, and max. 2.25 m between subsequent platforms.
4 m planking: Max. height to the first platform is 4.40 m, and max. 4.00 m between subsequent platforms.
The scaffold is built with fully welded joints on all frames, ensuring enhanced strength and stability. The diagonal braces and guardrails are fitted with high-impact, solid claws that are designed to withstand heavy loads and daily use.

The platforms are made from waterproof, non-slip Finnish birch plywood, mounted in strong aluminium frames, providing a stable and durable work surface. The staggered hooks on the platforms allow for lengthwise extension without displacement. Additionally, a patented storm lock underneath the platforms secures them against movement in windy conditions and fits all types of scaffolding.

As standard, JUMBO Scaffolding is equipped with extra-sturdy Ø125 mm castors with brakes. These castors feature a polyure

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice

Detail Images

Non-slip platforms equipped with staggered hooks, which makes lengthwise extention without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold

Fully welded frames

High-impact self-locking claws on all horizontal braces and diagonals (tube dimensions: Ø50x2mm). The claws are cast solid quality with fully welded joints.

The set consists of

2 PCS	12074200	Frame 2 m	**2** PCS	12074100	Frame 1 m
2 PCS	12074101	Guardrail frame narrow 1 m	**5** PCS	1103050	Horizontal brace / diagonal
3 PCS	1103510	Diagonals	**1** PCS	1003051	Platform w/hatch
4 PCS	1400125	Castor w/brakes	**8** PCS	1600100	Safety clips
4 PCS	FLB-1	Toeboard clip	**1** PCS	mont-RULLE	Assembly instructions Rolling scaffold
1 PCS	katalog/avis	JUMBO 2024 product brochure	**1** PCS	1003051	Platform w/hatch

Sparepart s

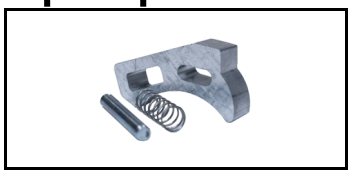

ALU Locking mechanism
1600300

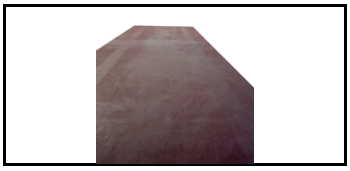

Plywood for platforms w/o hatch
7501780

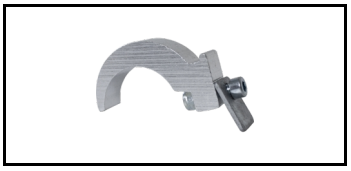

Hook
1690050

Storm lock
1003050231

End piece
100305023

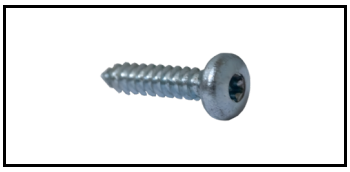

Screw
5,5x25 skrue

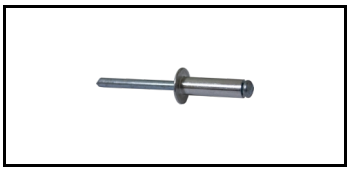

Pop rivet
Popnitte6,4x22

Pop rivet
Popnitte6,4x12

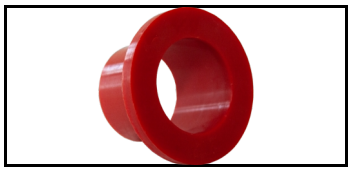

Bushing
1400210NY

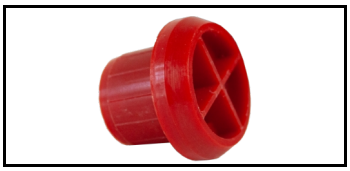

Top plug for screwjack
1400211NY

Accessories

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice

Exchanges castors
1400204
7782766

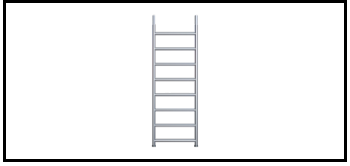

Frame 2 m
12074200
7782808

Extensions set for single towers
s-1305
5929675

Platform Sets w/Railing
103051sk
5741559

Toeboard Sets
1620305s
5741565

Outrigger
1410150
7782741

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice