


Pro Double Towers AGR


250 x 135 cm | 8.2 / 10.2 m



✓ EN1004

PRO

10 YEAR WARRANTY

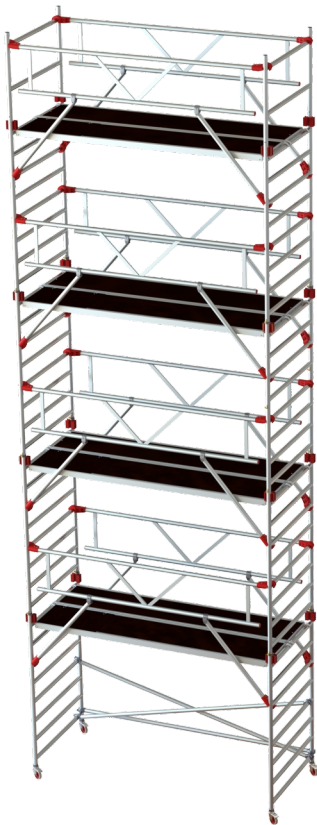

Specifications

- Working Height: 10.2 m
- Standing Height: 8.2 m
- Scaffolding Class: 3.0
- Load Capacity: 200 kg/m²
- Length: 250
- Width: 135 cm
- Weight: 321.3 kg
- Material: Aluminium, Plastic, Veneer
- Colour: Grey
- Castor Size: Ø12,5 cm
- Certification: EN1004
- Jumbo Brand: PRO SCAFFOLDS

Product no.	DBNumber	EAN Code	Jumbo Brand	Warranty	Net Weight
9900-8-A	2335429		PRO SCAFFOLDS	10 years	321.3 kg

Description

The JUMBO Scaffolding Pro Double Towers AGR is a professional-grade aluminium scaffold, perfect for craftsmen who require high quality and flexibility in their work. This set is specially configured for 2 m planking, with a maximum height to the first platform of 3.40 m and a distance of 2.25 m between subsequent platforms.

The scaffold is equipped with AGR (Advanced Guardrail) guardrails featuring built-in diagonal bracing, which adds extra stability and safety during use. The AGR guardrails are made with high-impact claws from fibreglass-reinforced plastic, ensuring a strong and reliable structure.

2m planking: Max. height to the first platform is 3.40 m and max. 2.25 m between following platforms.

Materials: The frames are made of aluminium with fully welded joints for added strength and stability. The scaffold decks are made from waterproof, non-slip Finnish birch plywood, mounted in strong aluminium frames. The staggered hooks on the decks allow for lengthwise extension without displacement. Additionally, the platforms are secured with a patented storm lock underneath, providing safety during windy conditions.

JUMBO Scaffolding is supplied as standard with extra sturdy Ø125 mm castors with brakes. The castors feature a durable pol

Detail Images



Non-slip platforms equipped with staggered hooks, which makes lengthwise extension without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold



Fully welded frames



Impact-resistant Fibreglass Reinforced Plastic Claws

The set consists of


4 STK	1400125	Castor w/brakes
2 STK	12135100	Frame 1 m
2 STK	1102504	Diagonals
8 STK	1102500-AGR	Railing w/diagonals
4 STK	1002500	Platform w/o hatch
16 STK	FLB-1	Toeboard clip
1 STK	katalog/avis	JUMBO 2024 product brochure

7 STK	12135200	Frame 2 m
2 STK	12135101	Guardrail frame wide
1 STK	1102500	Horizontal brace / diagonal
4 STK	1002501	Platform w/hatch
18 STK	1600100	Safety clips
1 STK	mont-RULLE	Assembly instructions Rolling scaffold

Spareparts



Accessories



Railing w/diagonals
1102500-AGR
2335720



Toeboard Sets
1620178s
5741563



Exchanges castors
1400204
7782766



Platform Sets w/Railing
102501BK
7782725



Frame 1 m
12135100
7782790



Frame 1 m
12074100
7782816



Frame 0,5 m
12074050
5929662



Outrigger
1410250
7782758



Extensions set for double
towers

b-1

7782709