Pro Single Towers

305 x 74 cm | 8.2 / 10.2 m | 4M

EN1004 PRO 10 YEAR WARRANTY

Specifications

Working Height: 10.2 m
Standing Height: 8.2 m
Scaffolding Class: 3.0
Length: 305 cm
Width: 74 cm
Weight: 186.26 kg
Material: Aluminium,Veneer
Colour: Grey
Castor Size: Ø12,5 cm
Certification: EN1004
Jumbo Brand: PRO SCAFFOLDS

Product no.	DBNumber	EAN Code	Jumbo Brand	Warranty	Net Weight
79305-8	5741568		PRO SCAFFOLDS	10 years	186.26 kg

Description

The JUMBO Scaffolding Pro Single Towers is a professional aluminium scaffold, specifically designed for 4 m planking. It is ideal for craftsmen who require a flexible and strong scaffold for larger construction and maintenance tasks.

4 m planking: Maximum height to the first platform is 4.40 m, with a distance of up to 4.00 m between subsequent platforms, making it perfect for working at elevated heights.
The scaffold's frames feature fully welded joints, ensuring additional strength and stability during use. Diagonal braces and guardrails are equipped with high-impact, fully cast claws at each end, providing added durability and robustness. The fully cast claws guarantee that the joints remain strong over time.

The platforms are made from waterproof, non-slip Finnish birch plywood, mounted in strong aluminium frames. The staggered hooks on the platforms allow for lengthwise extension without displacement. Underneath the platforms, a patented storm lock secures the decks, preventing movement during adverse weather conditions.

As standard, JUMBO Scaffolding is supplied with extra sturdy Ø125 mm castors with brakes, ensuring easy and safe mobility.

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice

Detail Images

Non-slip platforms equipped with staggered hooks, which makes lengthwise extention without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold

Fully welded frames

High-impact self-locking claws on all horizontal braces and diagonals (tube dimensions: Ø50x2mm). The claws are cast solid quality with fully welded joints.

The set consists of

2 PCS	1003051	Platform w/hatch
8 PCS	1103510	Diagonals
18 PCS	1600100	Safety clips
2 PCS	12074101	Guardrail frame narrow 1 m
8 PCS	FLB-1	Toeboard clip
1 PCS	katalog/avis	JUMBO 2024 product brochure

9 PCS	1103050	Horizontal brace / diagonal
4 PCS	1400125	Castor w/brakes
2 PCS	12074100	Frame 1 m
7 PCS	12074200	Frame 2 m
1 PCS	mont-RULLE	Assembly instructions Rolling scaffold

Spareparts

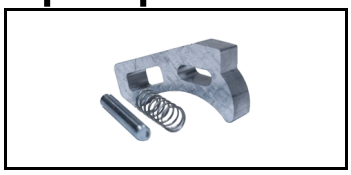

ALU Locking mechanism
1600300

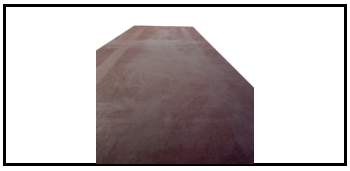

Plywood for platforms w/o hatch
7501780

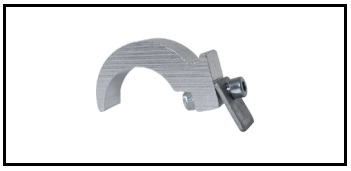

Hook
1690050

Storm lock
1003050231

End piece
100305023

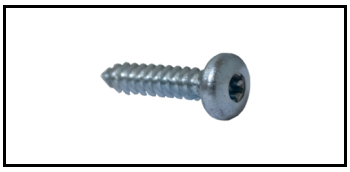

Screw
5,5x25 skrue

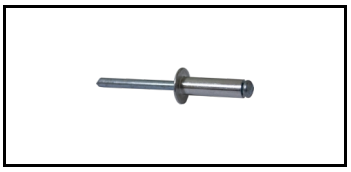

Pop rivet
Popnitte6,4x22

Pop rivet
Popnitte6,4x12

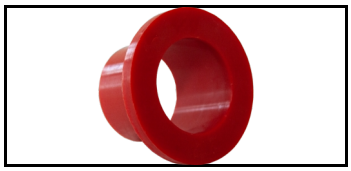

Bushing
1400210NY

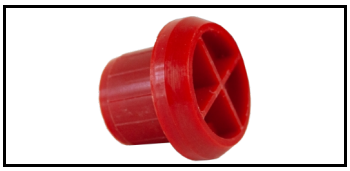

Top plug for screwjack
1400211NY

Accessories

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice

Exchanges castors
1400204
7782766

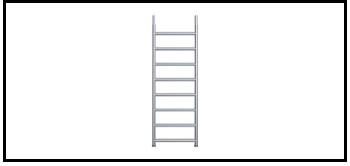

Frame 2 m
12074200
7782808

Extensions set for single towers
s-1305
5929675

Platform Sets w/Railing
103051sk
5741559

Toeboard Sets
1620305s
5741565

Outrigger
1410250
7782758

JUMBO takes no responsibility for typing errors, image errors, sold out items and price changes without further notice