


# Pro Double Towers AGR

305 x 135 cm | 5.2 / 7.2 m

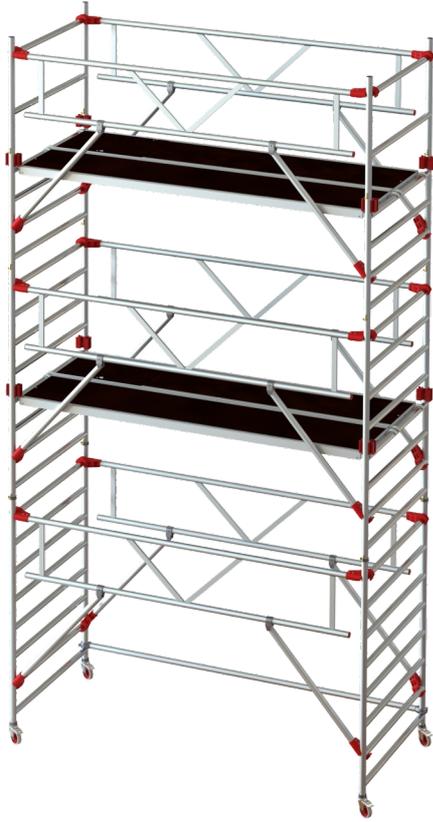

## Specifications

Working Height: 7.2 m  
Standing Height: 5.2 m  
Scaffolding Class: 3.0  
Load Capacity: 200 kg/m<sup>2</sup>  
Length: 305  
Width: 135 cm  
Weight: 226.66 kg  
Material: Aluminium, Plastic, Veneer  
Colour: Grey  
Castor Size: Ø12,5 cm  
Certification: EN1004  
Jumbo Brand: PRO SCAFFOLDS

Product no.	DBNumber	EAN Code	Jumbo Brand	Warranty	Net Weight
99305-5-A	2335438		PRO SCAFFOLDS	10 years	226.66 kg

## Description

The JUMBO Scaffolding Pro Double Towers AGR is a professional-grade aluminium scaffold, perfect for craftsmen who require high quality and flexibility in their work. This set is specially configured for 2 m planking, with a maximum height to the first platform of 3.40 m and a distance of 2.25 m between subsequent platforms.

The scaffold is equipped with AGR (Advanced Guardrail) guardrails featuring built-in diagonal bracing, which adds extra stability and safety during use. The AGR guardrails are made with high-impact claws from fibreglass-reinforced plastic, ensuring a strong and reliable structure.

2m planking: Max. height to the first platform is 3.40 m and max. 2.25 m between following platforms.

Materials: The frames are made of aluminium with fully welded joints for added strength and stability.


The scaffold decks are made from waterproof, non-slip Finnish birch plywood, mounted in strong aluminium frames. The staggered hooks on the decks allow for lengthwise extension without displacement. Additionally, the platforms are secured with a patented storm lock underneath, providing safety during windy conditions.

JUMBO Scaffolding is supplied as standard with extra sturdy Ø125 mm castors with brakes. The castors feature a durable pol

## Detail Images



Non-slip platforms equipped with staggered hooks, which makes lengthwise extension without displacement possible



Placed at each end under the platform, the patented storm locks are used to secure the platform to the scaffold



Fully welded frames




Impact-resistant Fibreglass Reinforced Plastic Claws


## The set consists of

4 PCS	1400125	Castor w/brakes	4 PCS	12135200	Frame 2 m
2 PCS	12135100	Frame 1 m	2 PCS	12135101	Guardrail frame wide
1 PCS	1103050	Horizontal brace / diagonal	6 PCS	1103050-AGR	Railing w/diagonals
2 PCS	1003051	Platform w/hatch	2 PCS	1003050	Platform w/o hatch
12 PCS	1600100	Safety clips	8 PCS	FLB-1	Toeboard clip
1 PCS	mont-RULLE	Assembly instructions Rolling scaffold	1 PCS	katalog/avis	JUMBO 2024 product brochure


## Spareparts



## Accessories



Railing w/diagonals  
1103050-AGR  
2335721



Toeboard Sets  
1620305b  
5741553



Exchanges castors  
1400204  
7782766




Platform Sets w/Railing  
103051BK  
5741562



Frame 2 m  
12074200  
7782808



Frame 1 m  
12074100  
7782816



Frame 0,5 m  
12074050  
5929662



Outrigger  
1410150  
7782741



Extensions set for double  
towers

b-1305

5929673